SET-UP SHEET

XT4'25 SET-UP SHEET VER. 1 ©XRAY

XRAY XT4'25

RACE			
TRACK			
NAME		DATE	

LAPS		BEST LAP TIME	sec
QUALIFYING POSITION		FINAL POSITION	

TRACK

SIZE	☐ OPEN	☐ MEDIUM	☐ TIGHT
TRACTION	☐☐☐☐☐☐☐☐		
	VERY-LOW	MEDIUM	VERY-HIGH
SURFACE	☐ SMOOTH	☐ MEDIUM	☐ BUMPY
TYPE	☐ CLAY	☐ CARPET	☐ ASTRO
CONDITION	☐ BLUE GROOVE	☐ HARD PACKED	☐ DRY
	☐ DUSTY	☐ LOAMY	☐ WET

DIFFERENTIAL TYPE

FRONT ↓	MIDDLE ↓	REAR ↓
	☐ SLIPPER	
☐ GEAR DIFF	☐ GEAR DIFF	☐ GEAR DIFF
☐ ACTIVE DIFF	☐ ACTIVE DIFF	☐ ACTIVE DIFF
☐ 60° ☐ 90° ☐ 120°	☐ 60° ☐ 90° ☐ 120°	☐ 60° ☐ 90° ☐ 120°
OIL cSt	OIL cSt	OIL cSt

SATELLITE GEARS

☐ COMPOSITE ☐ STEEL	☐ COMPOSITE ☐ STEEL	☐ COMPOSITE ☐ STEEL
40T ☐ ☐ 41T	CROWN GEAR	40T ☐ ☐ 41T

CENTRAL SLIPPER & ONE-WAY SETTING

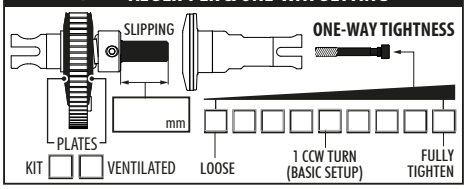

GEARING

PINION ☐ T ☐ T SPUR GEAR

SHOCKS

FRONT		REAR
	SPRINGS	
cSt	OIL	cSt
%	REBOUND	%
2 HOLES ☐	☐ ø1.6mm ☐ ø1.8mm	☐ 2 HOLES
Holes ø mm	ø mm	Holes
KIT ☐ Precision ☐	2.0mm ☐ 2.5mm PISTON THICKNESS	2.0mm ☐ 2.5mm KIT ☐ Precision ☐
KIT ☐ ALU ☐	0mm ☐ -2mm ☐ -4mm COLLAR	0mm ☐ -2mm ☐ -4mm KIT ☐ ALU ☐
☐ +4mm ☐ +2mm ☐ KIT	BALL JOINT	☐ KIT ☐ +2mm ☐ +4mm

ANTI ROLL BAR

FRONT		REAR
mm	THICKNESS	mm

TIRES

FRONT		REAR
	BRAND	
	COMPOUND	
	INSERTS	
	WHEELS	

ELECTRONICS

MOTOR			SPEEDO
MOTOR TIMING			BATTERY

BODY	TOTOAL WEIGHT
☐ LIGHT	/g
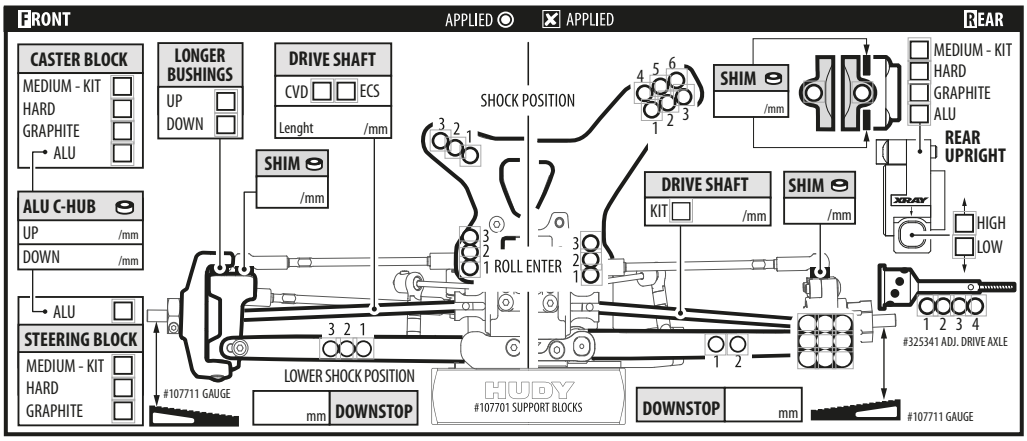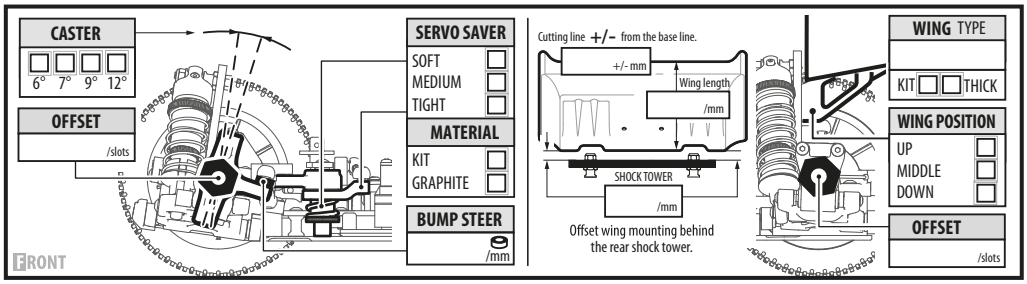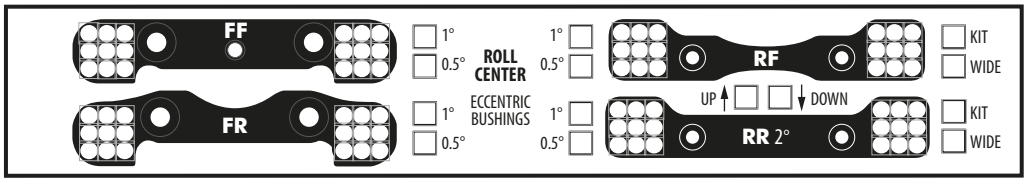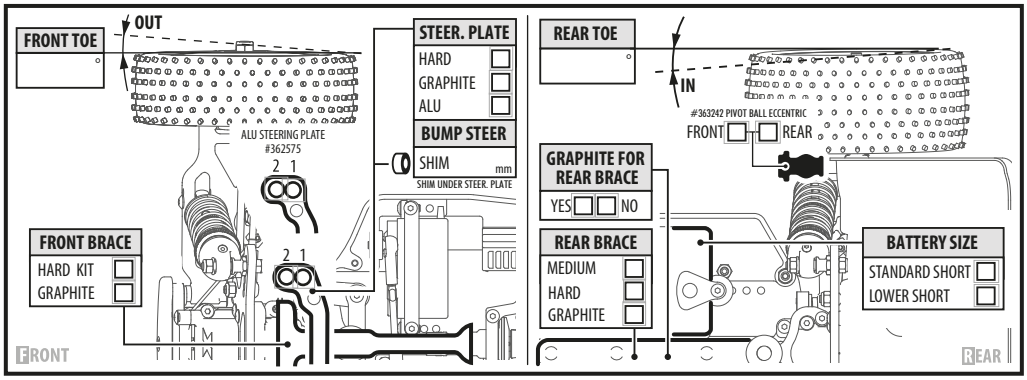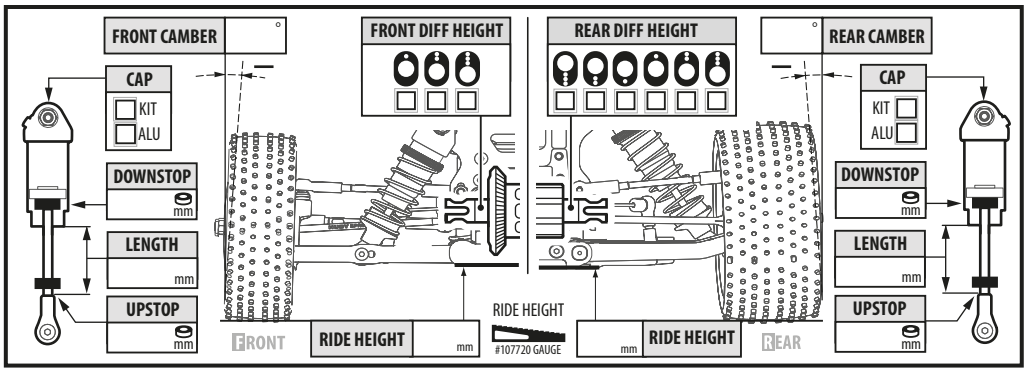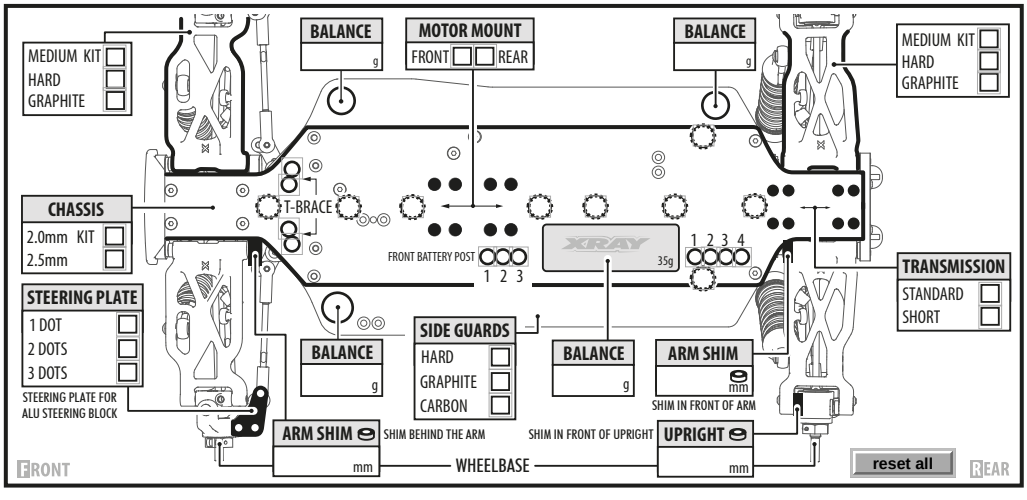
COMMENTS